

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
15 July 2004 (15.07.2004)

PCT

(10) International Publication Number
WO 2004/059113 A2

(51) International Patent Classification⁷: **E05C**

(21) International Application Number:
PCT/DK2003/000928

(22) International Filing Date:
22 December 2003 (22.12.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
BA 2002 00414 30 December 2002 (30.12.2002) DK

(71) Applicant (for all designated States except US): **BABY DAN A/S** [DK/DK]; Niels Bohrsvej 14, DK-8670 Låsby (DK).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **ANDERSEN, Finn** [DK/DK]; Randersvej 77, DK-8680 Ry (DK). **PEDERSEN, Henrik, L.** [DK/DK]; Høngevej 29, DK-8641 Sorring (DK). **HØJMOSE, Glenn** [DK/DK]; Stengårdsvej 20, DK-8600 Silkeborg (DK).

(74) Agent: **LARSEN & BIRKEHOLM A/S** Skandinavisk Patentbureau; Banegårdspladsen 1, P.O. Box 362, DK-1570 Copenhagen V (DK).

(81) Designated States (*national*): AE, AG, AL, AM, AT (utility model), AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (utility model), DE, DK (utility model), DK, DM, DZ, EC, EE (utility model), EE, EG, ES, FI (utility model), FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK (utility model), SK, SI, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (*regional*): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— without international search report and to be republished upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: A HINGE AND USE THEREOF

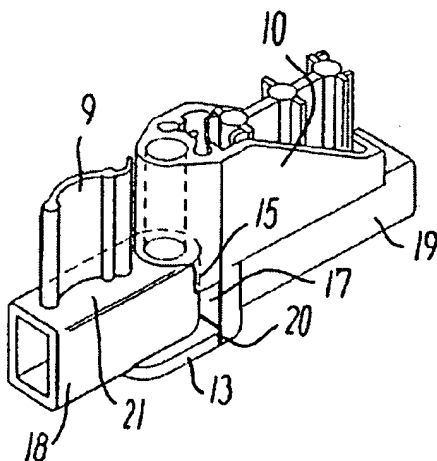

(57) Abstract: A hinge for a child safety barrier, consisting of first (1, 9) and second (2, 10) bracket parts, wherein the first bracket part is formed with a pin (4) whose free end is formed with a shoulder (5). The second bracket part (2, 10) is formed with a hole (7) with two sections, where the first section has a larger diameter than the second section. This provides an edge between the two sections, which, together with the shoulder (5) of the pin, serves as a lock between the two bracket parts. If the length of the pin is larger than the length of the section of the smallest diameter, then the two hinge parts may be displaced relative to each other in the direction of the pin, which is an advantage when the hinge is used in connection with child safety barriers. The two bracket parts of the hinge are formed with respective locking parts which cooperate such that when one bracket part is displaced relative to the other bracket part, the bracket parts may be rotated relative to each other.

WO 2004/059113 A2